



PRESSURES UP TO 3000 PSI

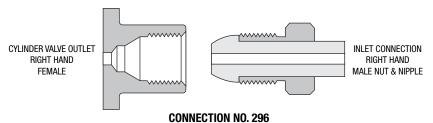


All dimensions are in inches - for reference only, subject to change.

	CYLIND	ER VA
PART NUMBER	DESCRIPTION	L
PLU-296BR	BRASS W/ BUNA O-RING LESS RING & CHAIN	1.00"
PLU-296BR-R	BRASS W/ BUNA O-RING	1.00"
PLU-296CH-R	NICKEL PLATED BRASS W/ BUNA O-RING	1.00"
PLU-296SS-TR	303 STAINLESS STEEL W/ PTFE 0-RING	1.00"

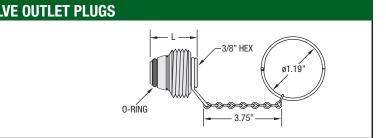

	INLETS X 1/4" MALE N	ATIONA
PART NUMBER	DESCRIPTION	L
INL-296BR-4M-56R	BRASS W/ FILTER	3.50"
INL-CV296BR-4M	BRASS W/ CHECK VALVE	3.50"
INL-296CH-4M-56R	NICKEL PLATED BRASS W/ FILTER	3.50"
INL-CV296CH-4M	NICKEL PLATED BRASS W/ CHECK VALVE	3.50"
INL-296SS-4M-42	STAINLESS STEEL	2.625"
INL-296SS-4M-42V	STAINLESS STEEL W/ VITON 0-RING	2.625"
INL-296SS-4M-56	STAINLESS STEEL	3.50"
INL-296SS-4M-56V	STAINLESS STEEL W/ VITON O-RING	3.00"
INL-CV296SS-4M	STAINLESS STEEL W/ CHECK VALVE	2.625"

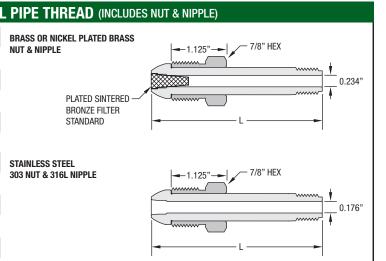

INLETS X 1/4 MALE FACE SEAL (INCLUDES 303 SS NUT & 316L SS NIPPLE)					
PART NUMBER	DESCRIPTION	L		1.125"→ 7/8" HEX	
INL-296SS-4MFS-44	STAINLESS STEEL 12 Ra	2.7	5"		
INL-296SS-4MFS-44V	STAINLESS STEEL W/ VITON O-RI	NG 12 Ra 2.7	5"	0.180"	
INL-296SS-4MFS-P	STAINLESS STEEL 9 Ra EP	2.7	5"		
Available with Check Valve	upon request	EP = Electropolished	ID	L	

INLETS X ORBITAL TUBE WELD STUB (INCLUDES SILVER PLATED 303 SS NUT & 316L SS NIPPLE)					
PART NUMBER	DESCRIPTION	L	T		
INL-296SS-4TS-42F	STAINLESS STEEL 12 Ra *	2.625"	1/4"0D x .035" WALL		
INL-296SS-4TS-P	STAINLESS STEEL 9 Ra EP *	2.625"	1/4"0D x .035" WALL	1.125"—— 7/8" HEX	
INL-CV296SS-4TS	STAINLESS STEEL W/ CHECK VALVE	2.625"	1/4"0D x .035" WALL	0.180"	
INL-296SS-6TS	STAINLESS STEEL 12 Ra	2.625"	3/8"0D x .035" WALL	0.75"	
INL-296SS-6TS-P	STAINLESS STEEL 9 Ra EP	2.625"	3/8"0D x .035" WALL	L	
INL-296SS-8TS	STAINLESS STEEL 12 Ra	2.625"	1/2"0D x .049" WALL		
INL-296SS-8TS-P	STAINLESS STEEL 9 Ra EP	2.625"	1/2"0D x .049" WALL	*PTH-7 Pigtail Handle available EP = Electropolish	



CGA296-2014 Rev. A

GasFlo Products Inc. CGA Compressed Gas Service Cylinder Connections are Manufactured to CGA V-1 Standards
Additional materials and configurations available on request. Minimum order quantities may be required.






PRESSURES UP TO 3000 PSI


COMPLETE PIGTAIL CONNECTION X ORBITAL TUBE WELD STUB (INCLUDES SILVER PLATED 303 SS NUT, 316L SS NIPPLE & 303 SS BLANK CAP)






COMPLETE PIGTAIL CONNECTION X 1/4 MALE FACE SEAL (INCLUDES 303 SS NUT, 316L SS NIPPLE & 303 SS BLANK CAP)






INLET OPTIONS & ACCESSORIES


VALVE OUTLET ADAPTORS




BLANK




W/ VITON O-RING









1/4" FNPT 1/4" FNPT 1/4" MNPT TIG WELD

1/4 MFS

TIG WELD


PART NUMBER	DESCRIPTION	L	
AD-296FBR-4FNPT	BRASS 1/4" FNPT	2.00"	
AD-296FBR-4MNPT	BRASS 1/4" MNPT	2.88"	
AD-296FBR-8MNPT	BRASS 1/2" MNPT	2.12"	
AD-296FSS-BL	303 SS BLANK CAP†	1.37"	
AD-296FSS-4FNPT	316L SS 1/4" FNPT	2.00"	
AD-296FSS-4MNPT	316L SS 1/4" MNPT	2.88"	
AD-296FSS-8MNPT	316L SS 1/2" MNPT	2.12"	
AD-296FSS-4MFS	316L SS 1/4 MALE FACE SEAL	2.83"	
†Blank cap available with ring & chain on request			

3 PIECE ADAPTORS (INCLUDES 303 SS NUT, 316L SS NIPPLE & SS OUTLET ADAPTOR)

PLEASE CONTACT GASFLO PRODUCTS INC. TO VERIFY ACCEPTABLE

3 PIECE ADAPTOR CONFIGURATIONS PRIOR TO ORDERING.

CALL: 973-276-9011 EMAIL: INFO@GASFLO.COM



VALVE, FITTING OR OTHER COMPONENT FUNCTION, PROPER INSTALLATION, MATERIALS COMPATIBILITY, ADEQUATE RATINGS, OPERATION AND MAINTENANCE ARE THE RESPONSIBILITY OF THE SYSTEM DESIGNER AND USER.



PRODUCT FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.



GasFlo Products Inc. CGA Compressed Gas Service Cylinder Connections are Manufactured to CGA V-1 Standards

Additional materials and configurations available on request. Minimum order quantities may be required.

40 Green Pond Road, Rockaway, NJ 07866 Phone: 973-276-9011 Fax: 973-276-9014 www.gasflo.com



1/2" MNPT-